




Gas Leak Detector (W507)

Gas leaks are dreaded, and also really dangerous. For that, Ambro-Sol offers this practical and simple spray: it can be used on welding seams, tubes, valves, connections, pressurized tanks and more. It is a non-flammable product, so it can be used on machinery and flammable conductors.

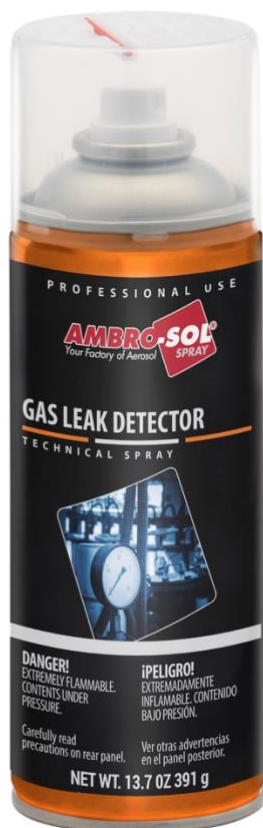

GAS LEAKS DETECTOR – Detects the leak of gas or compressed air in pipes, valves, welding seams, connections, canisters, pressurized tanks, tires, and exhausts. It is non-flammable and can be used to check gas stoves and mains.

Technical Specifications:

Barcode	EAN: 8034108890524
Quantity	400 ml – Net Wt. 13.7 oz 391 g
Case	12 pieces
Aspect	Cylinder containing under pressure fluid
Color	Typical
Odor	Odorless
Relative density	a 68°F 0.97 ÷ 1.01 g/ml
Flash point	Not flammable
Pressure at 20°C	7 bar
Operating temperature	>32°F/212°F ca.
PH	7.5-8.5
Boiling range	>212°F
Decomposing temperature	>392°F
Solubility	Water soluble
Biodegradability	92%(H ₂ O compound)
propellent	Nitrogen

HOW TO USE: Shake well before use. Hold the bottle upright and spray from a distance of 8 – 10 inches on the area to be tested. In the casd of a leak, bubbles or foam will form. This product can also be used with the attached straw. Protect from frost.

STORAGE

Before using: stock the product in a dry location above 40°F degrees and below 113°F. After use, keep containers closed. In the original package, the product can be conserved for 24 months.

After the first use: conserve in a fresh and dry location, away from hot conditions. Keep out of reach of children.

Hazards identification:

H229

Pressurized container: may burst if heated.

This information, even if reliable, must be considered only approximate. We are not responsible for the wrong use of the product, or the violation of any license. Before using, the users should verify the suitability of the product for its specific use.